




- NOTES:**
1. PLACE PLATE WASHER ON TOP OF CONSECUTIVE BEARING SHOES TO HOLD BEARING SHOES IN PLACE.
 2. EXTERIOR BEARING SHOES SHALL EXTEND AN ADDITIONAL 2" ALONG THE GRADE BEAM AND HAVE A COMPLETE ANCHOR BOLT HOLE TO SECURE IT IN PLACE.

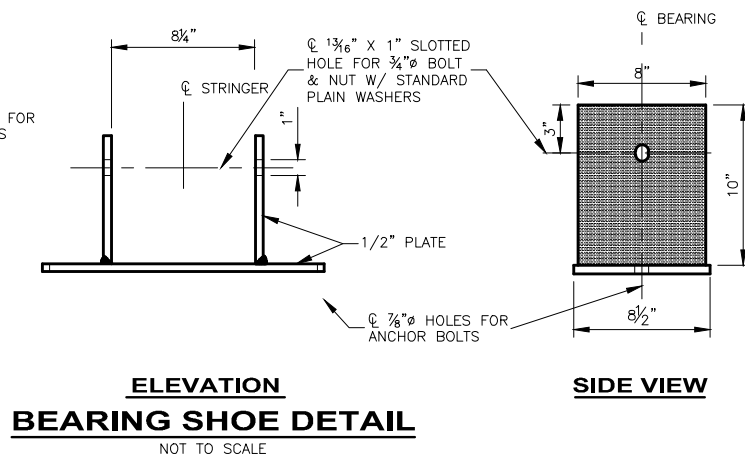

BRIDGE DETAILS JERRY BERISH SITE

WILLOW CREEK BRIDGE
BIG BLACKFOOT CHAPTER OF TROUT UNLIMITED

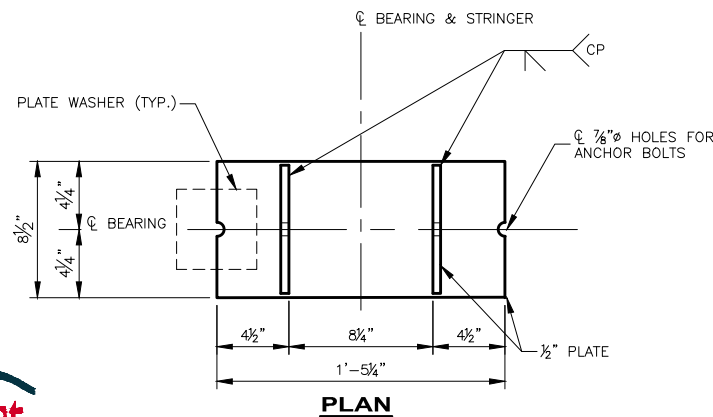